


Professional Laser Solutions You Can Trust

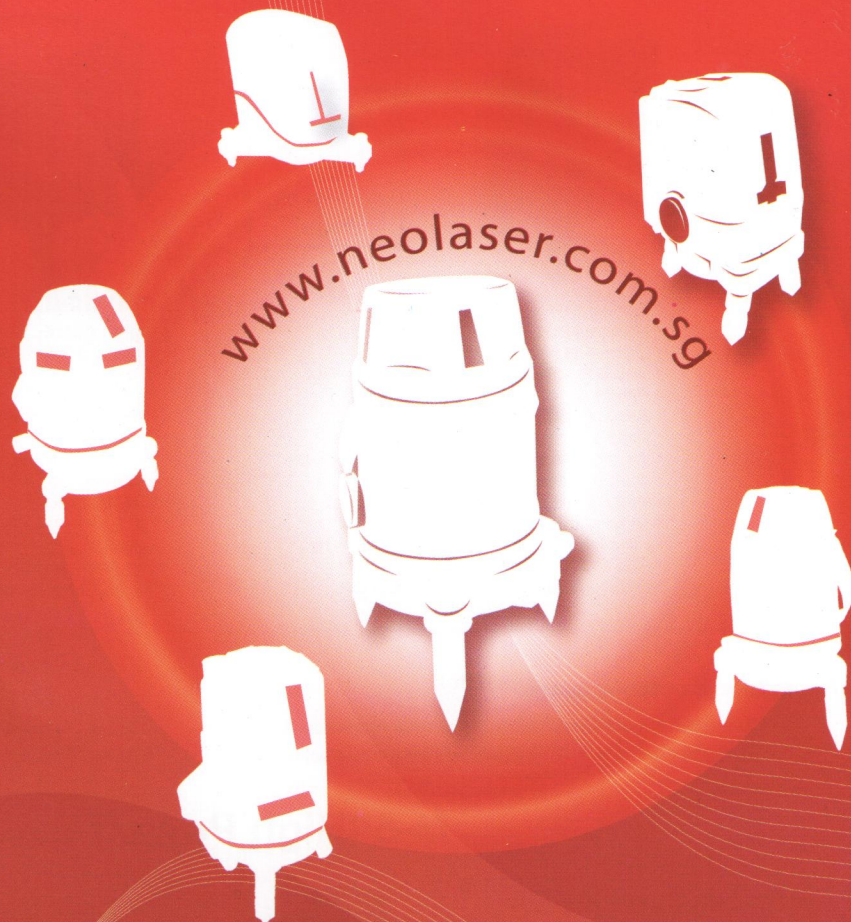


NISHIHARA

Model HL-400R

Motorised Remote Control Turning Industry Application:

- Ceiling construction
- Utilities, Air-conditioner, Fire control etc. installation
- Doors and Windows installation
- Marble, Tiles laying
- Carpentry and decorating, Elevated floors construction
- Suitable for most Construction Alignment Applications
- For indoor & outdoor usage



4 Vertical, 1 Horizontal, 1D/Point

Technical Specification:

- Laser safety standard : Class 2 laser product
- Laser wavelength : Vertical & Horizontal 7 x 635nm; Down point 1x 650nm
- Working range : up to 60m (with detector)
- Self leveling range : Approx. $\pm 3.0^\circ$
- Horizontal emissive angle : 120°
- Vertical emissive angle : 150°
- Horizontal precision : $\pm 1\text{mm}/7\text{m}$
- Vertical precision : $\pm 1\text{mm}/7\text{m}$
- Down point : $\pm 1\text{mm}/1.4\text{m}$
- Power supply : 3V (2*AA battery)
- Operating time : Approx. 8 hours
- Working temperature : $-10^\circ\text{C} \sim +45^\circ\text{C}$
- Weight : 1.47Kg (with battery)

**Sold in JAPAN

NEOLASER SOLUTIONS PTE LTD

No. 8, Kaki Bukit Road 2, Ruby Warehouse Complex #03-21,
Singapore 417841

Tel : 6743 7545 Fax : 6744 8094

Email : sales@neolaser.com.sg

THAILAND DISTRIBUTOR:

All right reserved. The catalogue belongs to property of NEOLASER SOLUTIONS PTE LTD



บริษัท ดิจิตอล ไลน์ จำกัด
Sales & Repairs

จำหน่าย กล้องสำรวจ และอุปกรณ์สำรวจ บริการซ่อม กล้องสำรวจ



โทร. 0-2977-1036-7 แฟกซ์. 0-2977-0901 สายด่วน. 081-910-6368, 081-811-3261
<http://www.surveying.is.in.th>



HL - 400R

Laser safety standard :	Class 2 laser product
Laser wavelength :	Vertical & Horizontal 7x635nm; DownPoint 1 x 650 nm
Working range :	up to 60m (with detector)
Self leveling range :	Approx. $\pm 3.0^\circ$
Horizontal emissive angle :	120°
Vertical emissive angle :	150°
Vertical precision :	$\pm 1\text{mm} / 7\text{m}$
Horizontal precision :	$\pm 1\text{mm} / 7\text{m}$
Down point :	$\pm 1\text{mm} / 1.4\text{m}$
Power supply :	3v (2*AA battery)
Operating time :	Approx. 8hours
Working temperature :	-10°c ~ + 45°c
weight :	1.47Kg (with battery)

