

# Model: 150REOZJB

# KOHLER POWER SYSTEMS

## 190-600 V 4 Cycle Diesel

**ISO 9001**  
**KOHLER**  
 POWER SYSTEMS  
 NATIONALLY REGISTERED

### Ratings Range


		60 Hz	50 Hz
Standby:	kW	100-160	90-132
	kVA	100-200	90-165
Prime:	kW	90-145	80-120
	kVA	90-181	80-150

### Generator Set Ratings

Alternator	Voltage	Ph	Hz	130° C Rise Standby Rating		105° C Rise Prime Rating	
				kW/kVA	Amps	kW/kVA	Amps
4S13W/ 4S13	120/208	3	60	160/200	555	145/181	503
	127/220	3	60	160/200	525	145/181	476
	120/240	3	60	160/200	481	145/181	436
	120/240	1	60	100/100	417	90/90	375
	139/240	3	60	160/200	481	145/181	436
	220/380	3	60	145/181	275	135/169	256
	277/480	3	60	160/200	241	145/181	218
	347/600	3	60	160/200	192	145/181	174
	110/190	3	50	132/165	501	120/150	456
	115/200	3	50	132/165	476	120/150	433
	120/208	3	50	132/165	458	120/150	416
	110/220	3	50	132/165	433	120/150	394
	110/220	1	50	90/90	409	80/80	364
	220/380	3	50	132/165	251	120/150	228
	230/400	3	50	132/165	238	120/150	217
	240/416	3	50	132/165	229	120/150	208
4S15W/ 4S15	120/208	3	60	160/200	555	145/181	503
	127/220	3	60	160/200	525	145/181	476
	120/240	3	60	160/200	481	145/181	436
	120/240	1	60	110/110	458	100/100	417
	139/240	3	60	160/200	481	145/181	436
	220/380	3	60	145/181	275	135/169	256
	277/480	3	60	160/200	241	145/181	218
	347/600	3	60	160/200	192	145/181	174
	110/190	3	50	132/165	501	120/150	456
	115/200	3	50	132/165	476	120/150	433
	120/208	3	50	132/165	458	120/150	416
	110/220	3	50	132/165	433	120/150	394
	220/380	3	50	132/165	251	120/150	228
	230/400	3	50	132/165	238	120/150	217
	240/416	3	50	132/165	229	120/150	208

### Standard Features

- Kohler Co. provides one-source responsibility for the generating system and accessories.
- The generator set and its components are prototype-tested, factory-built, and production-tested.
- The 60 Hz generator set offers a UL 2200 listing.
- The generator set accepts rated load in one step.
- The 60 Hz generator set engine is certified by the Environmental Protection Agency (EPA) to conform to Tier 1 nonroad emissions regulations.
- A one-year limited warranty covers all systems and components. Two-, five-, and ten-year extended warranties are also available.
- Alternator features:
  - Kohler's Fast-Response™ III wound field (WF) design alternator provides excellent voltage response and short-circuit capability using an auxiliary power brushless exciter.
  - Kohler's unique Fast-Response™ II excitation system delivers excellent voltage response and short circuit capability using a permanent magnet (PM)-excited alternator.
  - The brushless, rotating-field alternator has broadrange reconnectability.
- Other features:
  - Controllers are available for all applications. See controller features inside.
  - The low coolant level shutdown prevents overheating (standard on radiator models only).
  - Integral vibration isolation eliminates the need for under-unit vibration spring isolators.

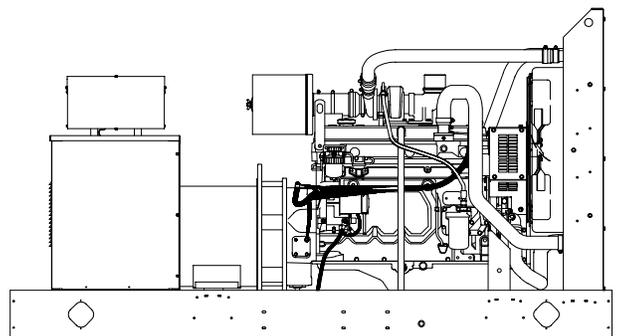

**RATINGS:** All three-phase units are rated at 0.8 power factor. All single-phase units are rated at 1.0 power factor. **Standby Ratings:** Standby ratings apply to installations served by a reliable utility source. The standby rating is applicable to varying loads for the duration of a power outage. There is no overload capability for this rating. Ratings are in accordance with ISO-3046/1, BS 5514, AS 2789, and DIN 6271. **Prime Power Ratings:** Prime power ratings apply to installations where utility power is unavailable or unreliable. At varying load, the number of generator set operating hours is unlimited. A 10% overload capacity is available for one hour in twelve. Ratings are in accordance with ISO-8528/1, overload power in accordance with ISO-3046/1, BS 5514, AS 2789, and DIN 6271. For limited running time and base load ratings, consult the factory. Obtain the technical information bulletin (TIB-101) on ratings guidelines for the complete ratings definitions. The generator set manufacturer reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever. **GENERAL GUIDELINES FOR DERATION:** *Altitude:* Derate 1.3% per 100 m (328 ft.) elevation above 1500 m (5000 ft.). *Temperature:* Derate 1.0% per 10°C (18°F) temperature above 25°C (77°F).

# Alternator Specifications

Specifications	Alternator
Manufacturer	Kohler
Type	4-Pole, Rotating-Field
Exciter type	
Wound field (WF) . . . . .	Wound Exciter Field with Separate Excitation Power Winding
Permanent magnet (PM) . . . . .	Brushless, Permanent-Magnet
Leads: quantity, type	12, Reconnectable
Voltage regulator	Solid State, Volts/Hz
Insulation:	NEMA MG1
Material . . . . .	Class H
Temperature rise . . . . .	130°C, Standby
Bearing: quantity, type	1, Sealed
Coupling	Flexible Disc
Amortisseur windings	Full
Voltage regulation, no-load to full-load	
Wound field (WF) alternator . . . . .	±0.25% Average
Permanent magnet (PM) alternator . . . . .	±2% Average
550 controller (with 0.5% drift due to temperature variation) . . . . .	3-Phase Sensing, ±0.25%
Unbalanced load capability	100% of Rated Standby Current
One-step load acceptance	100% of Rating
Peak motor starting kVA:	(35% dip for voltages below)
480 V, 380 V 4S13W/4S13 (12 lead) . . . . .	515 (60 Hz), 370 (50 Hz)
480 V, 380 V 4S15W/4S15 (12 lead) . . . . .	620 (60 Hz), 420 (50 Hz)

- NEMA MG1, IEEE, and ANSI standards compliance for temperature rise and motor starting.
- Sustained short-circuit current of up to 300% of the rated current for up to 10 seconds.
- Sustained short-circuit current enabling downstream circuit breakers to trip without collapsing the alternator field.
- Self-ventilated and drip-proof construction.
- Vacuum-impregnated windings with fungus-resistant epoxy varnish for dependability and long life.
- Superior voltage waveform from a two-thirds pitch stator and skewed rotor.
- Fast-Response™ III wound field (WF) brushless alternator with auxiliary power brushless exciter for excellent load response.
- Fast-Response™ II brushless alternator with brushless exciter for excellent load response.

## Application Data

### Engine

Engine Specifications	60 Hz	50 Hz
Manufacturer	John Deere	
Engine model	6068HF150	6068HF120
Engine type	4-Cycle, Turbocharged,	
Cylinder arrangement	6 Inline	
Displacement, L (cu. in.)	6.79 (414)	
Bore and stroke, mm (in.)	106 x 127 (4.19 x 5.00)	
Compression ratio	17.0:1	
Piston speed, m/min. (ft./min.)	457 (1500)	381 (1250)
Main bearings: quantity, type	7, Replaceable Insert	
Rated rpm	1800	1500
Max. power at rated rpm, kWm (BHP)	187 (251)	155 (208)
Cylinder head material	Cast Iron	
Crankshaft material	Forged Steel	
Valve material:		
Intake . . . . .	Chromium-Silicon Steel	
Exhaust . . . . .	Stainless Steel	
Governor: type, make/model	Mechanical, Stanadyne/DB4	
Frequency regulation, no-load to full-load	3-5%	
Frequency regulation, steady state	±0.33% (mech. governor) ±0.25% (elect. isoch. gov.)	
Frequency	Fixed	
Air cleaner type, all models	Dry	

### Exhaust

Exhaust System	60 Hz	50 Hz
Exhaust manifold type	Dry	
Exhaust flow at rated kW, m <sup>3</sup> /min. (cfm)	33.7 (1190)	20.7 (730)
Exhaust temperature at rated kW, dry exhaust, °C (°F)	566 (1050)	597 (1106)
Maximum allowable back pressure, kPa (in. Hg)	7.5 (2.2)	
Exhaust outlet size at engine hookup, mm (in.)	98 (3.86)	

### Engine Electrical

Engine Electrical System (12/24 Volt*)	60 Hz	50 Hz
Battery charging alternator:	12 Volt/24 Volt	
Ground (negative/positive)	Negative	
Volts (DC) . . . . .	12/24	
Ampere rating . . . . .	55/45	
Starter motor rated voltage (DC)	12/24	
Battery, recommended cold cranking amps (CCA):	12 Volt/24 Volt	
Quantity, CCA rating each	One, 800/Two, 570	
Battery voltage (DC)	12	

\*12-volt or 24-volt engine electrical systems are available.

# Application Data

## Fuel

Fuel System	60 Hz	50 Hz
Fuel supply line, min. ID, mm (in.)	11.0 (0.44)	
Fuel return line, min. ID, mm (in.)	6.0 (0.25)	
Max. lift, engine-driven fuel pump, m (ft.)	0.9 (3.0)	
Max. fuel flow, Lph (gph)	113 (29.9)	109 (28.9)
Fuel prime pump	Manual	
Fuel filter	Secondary, 8 Microns @ 98% Efficiency with Integral Water Separator	
Recommended fuel	#2 Diesel	

## Lubrication

Lubricating System	60 Hz	50 Hz
Type	Full Pressure	
Oil pan capacity, L (qt.)	23.7 (25.1)	
Oil pan capacity with filter, L (qt.)	24.6 (26.0)	
Oil filter: quantity, type	1, Cartridge	
Oil cooler	Water-Cooled	

## Cooling

Radiator System	60 Hz	50 Hz
Ambient temperature, °C (°F)*	50 (122)	
Engine jacket water capacity, L (gal.)	11.3 (3.0)	
Radiator system capacity, including engine, L (gal.)	22 (5.8)	
Engine jacket water flow, Lpm (gpm)	174 (46)	148 (39)
Heat rejected to cooling water at rated kW, dry exhaust, kW (Btu/min.)	77 (4370)	66 (3760)
Heat rejected to charge cooler at rated kW, dry exhaust, kW (Btu/min.)	25 (1440)	18 (1020)
Water pump type	Centrifugal	
Fan diameter, including blades, mm (in.)	660 (26)	
Fan, kWm (HP)	10.8 (14.5)	7.8 (10.5)
Max. restriction of cooling air, intake and discharge side of radiator, kPa (in. H <sub>2</sub> O)	0.125 (0.5)	

\* Enclosure with roof-mounted silencer reduces ambient temperature capability by 5°C (9°F). Enclosure with enclosed silencer reduces ambient temperature capability by 10°C (18°F).


## Operation Requirements

Air Requirements	60 Hz	50 Hz
Radiator-cooled cooling air, m <sup>3</sup> /min. (scfm)‡	278 (9800)	246 (8700)
Combustion air, m <sup>3</sup> /min. (cfm)	12.5 (440)	9.9 (350)
Heat rejected to ambient air:		
Engine, kW (Btu/min.)	36.7 (2090)	29.7 (1690)
Alternator, kW (Btu/min.)	12.8 (730)	13.0 (740)

‡ Air density = 1.20 kg/m<sup>3</sup> (0.075 lbm/ft<sup>3</sup>)


Fuel Consumption	60 Hz	50 Hz
<b>Diesel, Lph (gph) at % load</b>		
100%	45.4 (12.0)	36.7 (9.7)
75%	35.2 (9.3)	28.0 (7.4)
50%	24.2 (6.4)	19.7 (5.2)
25%	13.6 (3.6)	11.4 (3.0)
<b>Diesel, Lph (gph) at % load</b>		
100%	41.3 (10.9)	33.7 (8.9)
75%	32.2 (8.5)	26.1 (6.9)
50%	22.0 (5.8)	18.2 (4.8)
25%	12.9 (3.4)	10.6 (2.8)

## Controllers

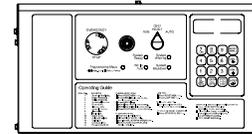


### Decision-Maker™ 550 Controller

Audiovisual annunciation with NFPA 110 Level 1 capability. Programmable microprocessor logic and digital display features. Alternator safeguard circuit protection. 12- or 24-volt engine electrical system capability. Remote start, remote annunciation, and remote communication options. Refer to G6-46 for additional controller features and accessories.

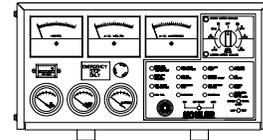

### Decision-Maker™ 3+, 16-Light Controller

Audiovisual annunciation with NFPA 110 Level 1 capability. Microprocessor logic, AC meters, and engine gauge features. 12- or 24-volt engine electrical system capability. Remote start, prime power, and remote annunciation options. Refer to G6-30 for additional controller features and accessories.

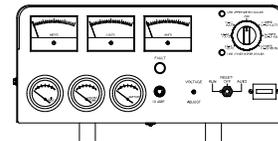

### Decision-Maker™ 1 Controller

Single-light annunciation and basic controls with NFPA capability. Relay logic, AC meters, and engine gauge features. 12-volt engine electrical system capability only. Remote or automatic start options. Refer to G6-29 for additional controller features and accessories.

## Standard Features and Accessories

### Additional Standard Features

- Alternator Protection (standard with 550 controller)
- Battery Rack and Cables
- Integral Vibration Isolation
- Oil Drain Extension
- Operation and Installation Literature

### Accessories

#### Enclosed Unit

- Sound Enclosure (with enclosed critical silencer)
- Weather Enclosure (with enclosed critical silencer)
- Weather Housing (with roof-mounted critical silencer)

#### Open Unit

- Exhaust Silencer, Critical (kit: PA-354809)
- Exhaust Silencer, Hospital (kit: PA-365349)
- Flexible Exhaust Connector, Stainless Steel

#### Cooling System

- Block Heater
- Radiator Duct Flange

#### Fuel System

- Auxiliary Fuel Pump
- Flexible Fuel Lines
- Fuel Pressure Gauge
- Subbase Fuel Tanks
- Subbase Fuel Tank with Day Tank

#### Electrical System

- Battery
- Battery Charger, Equalize/Float Type
- Battery Heater

#### Engine and Alternator

- Alternator, Wound Field (WF)
- Alternator, Permanent Magnet (PM)
- Air Cleaner, Heavy Duty
- Air Cleaner Restriction Indicator
- Alternator Strip Heater
- Bus Bar Kits
- CSA Certification
- Current Transformer Kit
- Electronic Isochronous Governor ( $\pm 0.25\%$  freq. reg. steady state)
- EPA Certified Engine for Tier 2
- Line Circuit Breaker (NEMA type 1 enclosure)
- Line Circuit Breaker with Shunt Trip (NEMA type 1 enclosure)
- Rated Power Factor Testing
- Rodent Guards
- Safeguard Breaker (not available with 550 controller)
- Skid End Caps
- Voltage Regulation, 1%
- Voltage Regulator Sensing, 3-Phase

#### Paralleling System

- Reactive Droop Compensator
- Remote Speed Adjust Control/Electronic Governor
- Voltage Adjust Control
- Voltage Regulator Relocation Kit

#### Maintenance

- General Maintenance Literature Kit
- Maintenance Kit (includes standard air, oil, and fuel filters)
- NFPA 110 Literature
- Overhaul Literature Kit
- Production Literature Kit

#### Controller (550 and 16-Light Controllers)


- Common Failure Relay Kit
- Communication Products and PC Software (550 controller only)
- Customer Connection Kit
- Dry Contact Kit (isolated alarm)
- Engine Prealarm Sender Kit
- Prime Power Switch (550 controller only)
- Remote Annunciator Panel
- Remote Audiovisual Alarm Panel
- Remote Emergency Stop Kit
- Remote Mounting Cable
- Run Relay Kit

#### Miscellaneous Accessories

- \_\_\_\_\_
- \_\_\_\_\_
- \_\_\_\_\_

### Dimensions and Weights

Overall Size, L x W x H, mm (in.): 2800 x 1040 x 1538  
 (110.24 x 40.94 x 60.55)  
 Weight (radiator model), wet, kg (lb.): 1429-1497 (3150-3300)

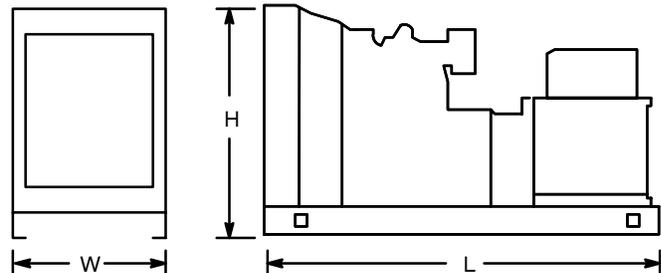

NOTE: This drawing is provided for reference only and should not be used for planning installation. Contact your local distributor for more detailed information.

### DISTRIBUTED BY: