

Model: **KV375**

KOHLER POWER SYSTEMS


200-415 V

Diesel

ISO 9001
KOHLER
POWER SYSTEMS
NATIONALLY REGISTERED

Ratings Range

		KV375
		50 Hz
Standby:	kW	300
	kVA	375
Prime:	kW	273
	kVA	341

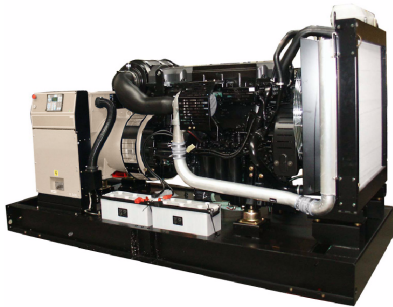

With Available Enclosure Accessory

Standard Features

- Kohler Co. provides one-source responsibility for the generating system and accessories.
- The generator set and its components are prototype-tested, factory-built, and production-tested.
- A one-year limited warranty covers all systems and components.
- Volvo engine with 24-volt battery charging alternator.
- Leroy Somer single-bearing alternator with insulation class H.
- Unit-mounted radiator with 50°C (122°F) ambient air capability.
- Skid and vibration isolators.
- Subbase fuel tank, 470 L (124 gal.).
- Dry type air filter.
- Main line circuit breaker.
- Microprocessor controller.
- Battery, battery rack, and cables.
- Industrial exhaust silencer (loose).
- Operation and installation literature.

Generator Set Ratings

Alternator	Voltage	Ph	Hz	Standby Rating		Prime Rating	
				kW/kVA	Amps	kW/kVA	Amps
	115/200	3	50	300/375	1083	273/341	985
	110/220	3	50	300/375	984	273/341	896
	115/230	3	50	300/375	941	273/341	857
LSA472VS2	120/240	3	50	300/375	902	273/341	821
	220/380	3	50	300/375	570	273/341	518
	230/400	3	50	300/375	541	273/341	493
	240/415	3	50	300/375	522	273/341	475

RATINGS: All three-phase units are rated at 0.8 power factor. See TIB-109 for generator set derate tables.

Obtain the technical information bulletin (TIB-101) on ratings guidelines for the complete ratings definitions.

PRP: Prime power is available for an unlimited number of annual operating hours in variable load applications in accordance with ISO-8528/1.

A 10% overload capability is available for a period of 1 hour within a 12-hour period of operating in accordance with ISO-3046/1.

ESP: The emergency standby power rating is applicable for supplying emergency power in variable load applications in accordance with ISO-8528/1. Overload is not allowed.

The generator set manufacturer reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever.

Alternator Specifications

- NEMA-MG21, UTE NF C51.111, VDE 0530, BS 4999, CSA standards compliance for temperature rise and motor starting.
- Self-ventilated and dripproof construction.
- Vacuum-impregnated windings with fungus-resistant epoxy varnish for dependability and long life.
- Superior voltage waveform from a two-thirds pitch stator and skewed rotor.

Specifications	
Ratings voltage	400
Standby rating @ 27°C, kVA	420
Prime rating @ 40°C, kVA	365
Efficiency @ full load	93.3%
Air flow, m ³ /min. (cfm)	54 (1907)
Direct axis subtransient reactance (X ["] d)	15.4%

Specifications	Alternator
Manufacturer	Leroy Somer
Type	4-Pole, Rotating-Field
Exciter type	Shunt
Leads: quantity, type	12, Reconnectable
Voltage regulator	Solid State, R230
Insulation:	NEMA MG1
Material	Class H
Bearing: quantity, type	1, Sealed
Coupling	Direct
Voltage regulation, no-load to full-load	±0.5%

Application Data

Engine

Engine Specifications	
Manufacturer	Volvo
Engine model	TAD941GE
Engine type	4-Cycle, Turbocharged
Cylinder arrangement	6 Inline
Displacement, L (cu. in.)	9.36 (571)
Bore and stroke, mm (in.)	120 x 138 (4.7 x 5.4)
Compression ratio	17.4:1
Piston speed, m/min. (ft./min.)	450 (1476)
Rated rpm	1500
Max. power at rated rpm, kWm (BHP)	354 (474)
Governor type	Isochronous
Frequency regulation, no-load to full-load	ISO 5%
Frequency regulation, steady state	±0.5%
Air cleaner type, all models	Dry

Engine Electrical

Engine Electrical System	
Battery charging alternator:	24 Volt
Ground (negative/positive)	Negative
Volts (DC)	24
Starter motor rated voltage (DC)	24
Battery, recommended cold cranking amps (CCA):	
Quantity, CCA rating each	Two, 1000
Battery voltage (DC)	12

Fuel

Fuel System	
Max. fuel flow, Lph (gph)	500 (132)
Fuel prime pump	Manual
Recommended fuel	#2 Diesel
Fuel tank capacity, L (gal.)	470 (124)

Lubrication

Lubricating System	
Type	Full Pressure
Oil pan capacity, L (qt.)	28 (29.6)
Oil pan capacity with filter, L (qt.)	33 (34.8)

Exhaust

Exhaust System	
Exhaust manifold type	Dry
Exhaust flow at rated kW, m ³ /min. (cfm)	58 (2047)
Exhaust temperature at rated kW, dry exhaust, °C (°F)	490 (914)
Maximum allowable back pressure, kPa (in. Hg)	9.7 (2.9)
Exhaust outlet size at engine hookup, mm (in.)	85 (3.35)

Application Data

Cooling

Radiator System	
Ambient temperature, °C (°F)	50 (122)
Radiator system capacity, including engine, L (gal.)	41 (10.8)
Heat rejected to cooling water at rated kW, dry exhaust, kW (Btu/min.)	123 (6994)
Water pump type	Centrifugal
Fan, kWm (HP)	9 (12)
Max. restriction of cooling air, intake and discharge side of radiator, kPa (in. H ₂ O)	0.5 (2.0)

Operation Requirements

Air Requirements	
Radiator-cooled cooling air, m ³ /min. (scfm) *	462 (16317)
Combustion air, m ³ /min. (cfm)	23.5 (831)

* Air density = 1.20 kg/m³ (0.075 lbf/ft³)

Fuel Consumption

Diesel, Lph (gph) at % load	Standby Rating
110% (standby rating)	82.2 (21.7)

Diesel, Lph (gph) at % load	Prime Rating
100% (of the prime rating)	74.4 (19.7)
75% (of the prime rating)	55.0 (14.5)
50% (of the prime rating)	37.4 (9.9)

Controllers



Decision-Maker™ 4000

Standard Features

- Large LCD display panel
- Unique control wheel for system access
- User buttons for start, stop, menu, and escape
- Emergency stop button
- On/off key switch
- Panel-mounted battery fuse
- Panel-mounted USB ports for PC access and software upgrades
- Password protected access to control parameters
- Upgradeable software for future enhancements

LCD Panel Features

- 600 x 800 resolution
- Multiple lines of text or graphic display
- Icons for quick identification of system status
- Five languages: English, French, German, Portuguese, and Spanish

Communication Features

- Engine communication via CANbus
- Modbus communication via RS-485 or Ethernet
- PC and flash drive connections via USB

Functions

- View and adjust system operation parameters
- View system faults

Viewable/Selectable Parameters (may require optional module)

- Voltage: phase-to-neutral, total voltage
- Current
- Frequency
- Power (active/reactive/apparent)
- Power factor
- Engine speed
- Oil pressure
- Coolant temperature
- Battery voltage
- Fuel level (%)
- Time delays

Viewable Faults (over 60 individual faults are monitored) including:

- Alternator protection
- Circuit breaker and ground fault protection
- Communication and engine ECM monitoring
- Cooling air monitoring
- Electrical charging system
- Engine cooling system
- Engine lube system
- Fuel system
- Generator set status

Available Accessories

Enclosed Unit

- Sound Enclosure M228, 67 dB(A) @ 7 m (23 ft.), Standby (with enclosed critical silencer)

Open Unit

- Exhaust Silencer, Critical 40 dB(A) Reduction
- Exhaust Silencer, Residential 29 dB(A) Reduction
- Extension, 40 cm (16 in.)
- Flexible Exhaust Connector
- Protection Mesh for Exhaust Parts

Cooling System

- Block Heater [recommended for ambient temperatures below 0°C (32°F)]
- Radiator Core Guard

Controller

- Alternator Protection
- Audible Alarm Module
- Five Expandable Modules with Four Inputs/Six Outputs Each
- Network Modules (RTC and GSM modems and ethernet router)
- NFPA-110 Module
- Remote Annunciator
- Voltage/Speed Adjustment Module
- WinTelys Software

Fuel System

- Automatic Fuel Tank Fill Kit
- Subbase Fuel Tank with Secondary Containment Basin
- Subbase Fuel Tank Leak Alarm
- Water Separator Fuel Filter

Electrical System

- Battery Charger, Equalize/Float Type
- Battery Isolator Switch

Engine and Alternator


- Alternator Strip Heater
- Air Cleaner, Heavy Duty (with air restriction indicator)
- Electronic Isochronous Governor
- Lube Oil Drain Pump
- PMG Alternator and Voltage Regulator
- Tropical Heavy-Duty Alternator Insulation

Miscellaneous Accessories

- _____
- _____
- _____
- _____
- _____
- _____
- _____
- _____
- _____


Dimensions and Weights

Open Model

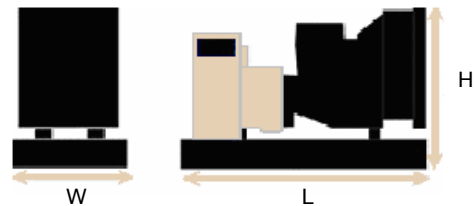

Overall Size, L x W x H, mm (in.): 3160 x 1340 x 1761 (124 x 53 x 69)
 Weight, wet, kg (lb.): 3250 (7163)

With Available Enclosure Accessory

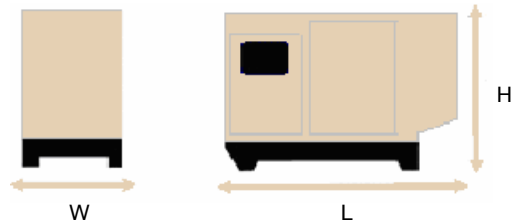

Overall Size, L x W x H, mm (in.): 4475 x 1410 x 2430 (176 x 56 x 96)
 Weight, wet, kg (lb.): 4380 (9654)

NOTE: This drawing is provided for reference only and should not be used for planning installation. Contact your local distributor for more detailed information.

DISTRIBUTED BY: