Model: 1250REOZM

KOHLER, POVVER SYSTEMS


380-480 V

4-Cycle Diesel



Ratings Range

		60 HZ	50 HZ
Standby:	kW	1250-1270	1120-1128
	kVA	1563-1588	1400-1410
Prime:	kW	1140-1160	1028
	kVA	1425-1450	1285

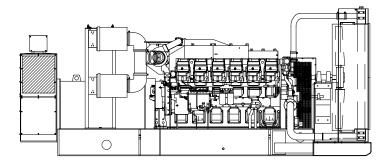

Standard Features

- Kohler Co. provides one-source responsibility for the generating system and accessories.
- The generator set and its components are prototypetested, factory-built, and production-tested.
- At 60 Hz the generator set accepts rated load in one step.
- · The 60 Hz generator set offers a UL 2200 listing.
- The generator set complies with ISO 8528-5, Class G3 requirements for transient performance.
- The 60 Hz generator set engine is certified by the Environmental Protection Agency (EPA) to conform to Tier 1 nonroad emissions regulations.
- A one-year limited warranty covers all systems and components. Two-, five-, and ten-year extended warranties are also available.
- · Generator features:
 - The brushless, rotating-field generator has broadrange reconnectability.
 - The pilot-excited, permanent magnet-excited generator (PMG) provides superior short-circuit capability.
- Other features:
 - Controllers are available for all applications. See controller features inside.
 - The low coolant level shutdown prevents overheating (standard on radiator models only).
 - o The generator set is direct-mounted to the skid.
 - An electronic, isochronous governor delivers precise frequency regulation.
 - o 50°C ambient radiators are optional.

Generator Ratings

Alternator	Voltage	Ph	Hz	150°C F Standby I kW/kVA		125°C Rise Prime Rating kW/kVA Amps
	220/380	3	50	1120/1400	2127	1028/1285 1952
7M4050	230/400	3	50	1128/1410	2035	1028/1285 1855
	240/416	3	50	1120/1400	1943	1028/1285 1783
7M4172	220/380	3	60	1270/1588	2412	1160/1450 2203
7M4046	277/480	3	60	1250/1563	1879	1140/1425 1714

RATINGS: All three-phase units are rated at 0.8 power factor. Standby Ratings: Standby ratings apply to installations served by a reliable utility source. The standby rating is applicable to varying loads for the duration of a power outage. There is no overload capability for this rating. Ratings are in accordance with ISO-3046/1, BS 5514, AS 2789, and DIN 6271. Prime Power Ratings: Prime power ratings apply to installations where utility power is unavailable or one hour in theelve. Ratings are in accordance with ISO-8528/1, overload power in accordance with ISO-3046/1, BS 5514, AS 2789, and DIN 6271. For limited running time and base load ratings, consult the factory. Obtain the technical information bulletin (TIB-101) on ratings guidelines for the complete ratings definitions. The generator set manufacturer reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever. GENERAL GUIDELINES FOR DERATION: Altitude: Derate 1.0% per 100 m (328 ft.) elevation above 1500 m (4921 ft.). Temperature: Derate 4.0% per 10°C (18°F) temperature above 40°C (104°F). 50Hz ratings are applicable on Singapore built models only.

Alternator Specifications

		<u> </u>	
Specifications		Generator	
Type		4-Pole, Rotating-Field	
Exciter type		Brushless, Permanent-	
		Magnet Pilot Exciter	
Voltage regulator		Solid State, Volts/Hz	
Insulation:		NEMA MG1	
Material .		Class H, Synthetic,	
		Nonhygroscopic	
Temperat	ure rise	125°C Prime, 150°C Standby	
Bearing: quantity,	type	1, Sealed	
Coupling		Flexible Disc	
Amortisseur wind	dings	Full	
Rotor balancing		125% 60Hz, 150% 50Hz	
Voltage regulation	n, no-load to full-load		
(with <0.5% drift due to temp Variation)		3-Phase Sensing, ±0.25%	
One-step load a	cceptance	100% of Rating	
Unbalanced load capability		100% of Rated Standby Current	
Peak motor starting kVA:		(35% dip for voltages below)	
480 V	7M4046 (4 bus bar)	3900 (60Hz)	
416 V	7M4050 (4 bus bar)	3600 (50Hz)	
380 V 7M4172 (4 bus bar)		2600 (60Hz)	

- NEMA MG1, IEEE, and ANSI standards compliance for temperature rise and motor starting.
- Sustained short-circuit current of up to 300% of the rated current for up to 10 seconds.
- Sustained short-circuit current enabling downstream circuit breakers to trip without collapsing the generator field.
- · Self-ventilated and dripproof construction.
- Superior voltage waveform from two-thirds pitch windings and skewed stator.
- Digital solid-state, volts-per-hertz voltage regulator with ±0.25% no-load to full-load regulation.
- Brushless alternator with brushless pilot exciter for excellent load response.

Application Data

Engine

Engine Specifications	60 Hz	50 Hz	
Engine model	D1250 49.0A60	D1250 49.0A50	
Engine type	4-Cycle, tur	bocharged	
Cylinder arrangement	12	12 V	
Displacement, L (cu. in.)	49.03 (2992)	
Bore and stroke, mm (in.)	170 x 180 (6	6.69 x 7.09)	
Compression ratio	15.0	15.0:1	
Piston speed, m/min. (ft./min.)	648 (2126)	540 (1772)	
Main bearings: quantity, type	-	-	
Rated rpm	1800	1500	
Max. power at rated rpm, kWm (BHP)	1403 (1881)	1220 (1635)	
Cylinder head material	Cast	Iron	
Crankshaft material	Forge	d Steel	
Governor: type, make/model	Electronic, PROA	Woodward CTII	
Frequency regulation, no-load to full-load	Isochronous		
Frequency regulation, steady state	±0.25%		
Frequency	Fixed		
Air cleaner type, all models	Dr	у	

Exhaust

Exhaust System	60 Hz	50 Hz
Exhaust manifold type	Dr	У
Exhaust flow at rated kW, m³/min. (cfm)	334 (11794)	266 (9392)
Exhaust temperature at rated kW, dry exhaust, °C (°F)	501 (934)	526 (979)
Maximum allowable back pressure, kPa (in. Hg)	5.9 (⁻	1.7)
Exhaust outlet size at engine hookup, mm (in.)	See ADV	drawing

Engine Electrical

Engine Electrical System	60 Hz	50 Hz	
Battery charging alternator:			
Ground (negative/positive)	Negative		
Volts (DC)	24		
Ampere rating	30		
Starter motor rated voltage (DC)	Dual, 24		
Battery, recommended cold cranking amps (CCA):			
Qty., CCA rating	4, 1	000	
Battery voltage (DC)	1	2	

Fuel

Fuel System	60 Hz	50 Hz	
Fuel supply line, min. ID, mm (in.)	25 (1	.0)	
Fuel return line, min. ID, mm (in.)	19 (0	19 (0.75)	
Max. lift, engine-driven fuel pump, m (ft.)	1 (3)		
Max. fuel flow, Lph (gph)	480 (127)	430 (114)	
Max. fuel pump restriction, kPa (in. Hg)	10 (3	3.0)	
Fuel filter: quantity, type	4, Secondary		
Recommended fuel	#2 Diesel		

Lubrication

Lubricating System	60 Hz	50 Hz
Туре	Full Pressure	
Oil pan capacity, L (qt.)	150 (159)	
Oil pan capacity with filter, L (qt.)	(qt.) 200 (211)	
Oil filter: quantity, type	4, Cartridge	
Oil Cooler	oler Water-Cooled	

Application Data

Cooling


Radiator System	60 Hz	50 Hz	
Ambient temperature	40 (104)	
Engine jacket water capacity, L (gal.)	125	125 (33)	
Radiator system capacity, including			
engine, L (gal.)	355	(94)	
Engine jacket water flow, Lpm (gpm)	1850 (489)	1650 (436)	
Heat rejected to cooling water at rated			
kW, dry exhaust, kW (Btu/min.)	919 (52336)	734 (41786)	
Water pump type	Centrifugal		
Fan diameter, including blades, mm (in	.) 1524	(60)	
Fan, kWm (HP)	41 (55)	32.5 (43.6)	
Max. restriction of cooling air, intake ar	nd		
discharge side of radiator, kPa (in. H ₂ O) 0.125	5 (0.5)	

Operation Requirements

Air Requirements	60 Hz	50 Hz
Radiator-cooled cooling air, m³/min. (scfm) ~	2039 (72000)	1650 (58275)
Combustion air, m³/min. (cfm)	126 (4449)	101 (3566)
Heat rejected to ambient air:		
Engine, kW(Btu/min.)	. 110 (6280)	88 (5014)
Generator, kW (Btu/min.)	. 71 (4038)	64 (3640)
~ Air density = 1.20 kg/m3 (0.075 lbm/	′ft3)	

60 Hz	50 Hz
Diesel, Lph (gph) at % load Standby Ratio	
354 (93.6)	282 (74.6)
263 (69.4)	213 (56.4)
184 (48.6)	148 (39.1)
104 (27.6)	84 (22.1)
Prime Rating	
319 (84.4)	257 (67.8)
241 (63.7)	196 (51.7)
172 (45.4)	138 (36.4)
103 (27.1)	81 (21.3)
	Standby 354 (93.6) 263 (69.4) 184 (48.6) 104 (27.6) Prime 319 (84.4) 241 (63.7) 172 (45.4)

Controllers



Decision-Maker[™] 550 Controller

Audiovisual annunciation with NFPA 110 Level 1 capability. Programmable microprocessor logic and digital display features. Generator safeguard circuit protection.

12- or 24-volt engine electrical system capability.

Remote start, remote annunciation, and remote communication options. Refer to G6-46 for additional controller features and accessories.

KOHLER CO., Kohler, Wisconsin 53044 USA Phone 920-565-3381, Fax 920-459-1646 For the nearest sales and service outlet in the US and Canada, phone 1-800-544-2444 www.KohlerPowerSystems.com

Crankcase Emissions Canister ☐ Engine Fluids (oil and coolant) Added

☐ Line Circuit Breaker (NEMA type 1 enclosure)

☐ Line Circuit Breaker with Shunt Trip (NEMA type 1 enclosure)

Safeguard Breaker (not available with Decision-Maker[™] 550)

☐ Generator Strip Heater

■ Oil Temperature Gauge Optional Generators

■ Spring Isolators

■ Rated Power Factor Testing

Paralleling System ■ Load-Sharing Module


■ Voltage Adjustment Control (manual)

Kohler Power Systems Asia Pacific Headquarters 7 Jurong Pier Road Singapore 619159 Phone (65) 6264 6422 Fax (65) 6264 6455 www.kohler.com.sg


Standard Features and Accessories

Maintenance and Literature Additional Standard Features ☐ General Maintenance Literature Kit Alternator Protection (standard with Decision-Maker™ 550) ☐ Maintenance Kit (includes air, oil, and fuel filters) Electronic, Isochronous Governor ■ NFPA 110 Literature Oil Drain Extension ■ Overhaul Literature Kit Operation and Installation Literature Pilot-Excited, Permanent Magnet Generator (PMG) ■ Production Literature Kit Controller Accessories Common Failure Relay Kit □ Communications Products and PC Software Open Unit (Decision-Maker™ 550 only) Exhaust Silencer, Hospital Customer Connection Kit ■ Exhaust Silencer, Critical ■ Dry Contact Kit (isolated alarm) ☐ Flexible Exhaust Connector, Stainless Steel □ Prime Power Switch (Decision-Maker[™] 550 only) Cooling System ■ Remote Annunciator Panel ■ Block Heater ■ Remote Audiovisual Alarm Panel [recommended for ambient temperatures below 20°C (68°F)] ☐ Remote Emergency Stop Kit ■ Radiator Duct Flange ■ Remote Mounting Cable □ Remote Radiator Cooling Run Relay Kit **Fuel System** Miscellaneous Accessories ☐ Flexible Fuel Lines ☐ Fuel Pressure Gauge ☐ Fuel/Water Separator ■ Subbase Fuel Tank with Day Tank **Electrical System** Battery **Dimensions and Weights** ■ Battery Charger, Equalize/Float Type Overall Size, L x W x H, mm (in.): ■ Battery Heater 5113 x 2242 x 2232 (201.3 x 88.3 x 87.9) w/7M4046 ■ Battery Rack and Cables W/7M4050 5263 x 2242 x 2232 (207.2 x 88.3 x 87.9) **Engine and Generator** 5097 x 2242 x 2232 (200.7 x 88.3 x 87.9) w/7M4172 □ Air Cleaner, Heavy Duty □ Air Cleaner Restriction Indicator Weight (radiator model), wet, max., kg (lb.): ☐ Bus Bar Kits (standard on 7M generators, 380-600 volt only)

11310 (24912)

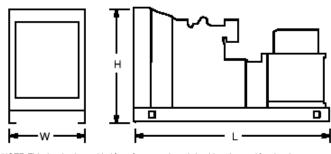

NOTE: This drawing is provided for reference only and should not be used for planning installation. Contact your local distributor for more detailed information.

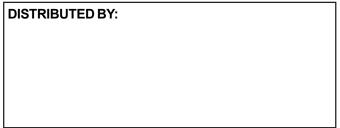

© 2003, 2004 by Kohler Co. All rights reserved.