
# CARVER

### Auto Series Compact Automatic Benchtop Presses 15 to 48 ton capacity

## Automatic hydraulic laboratory presses in two- and four-post models up to 48 ton clamp capacity

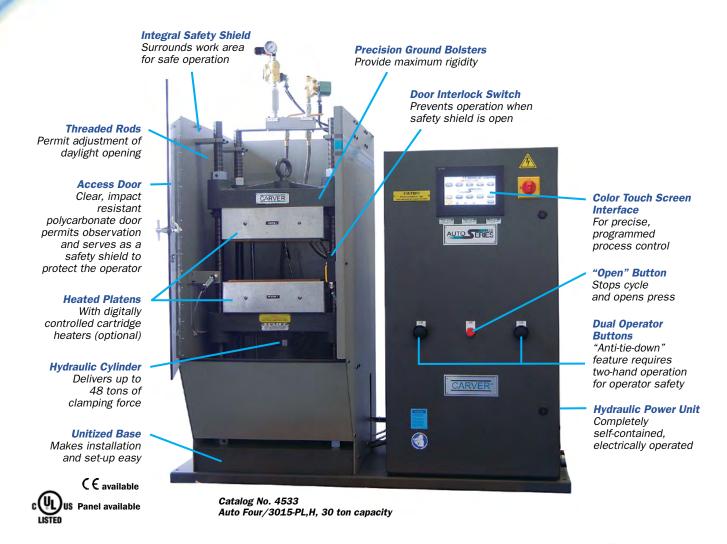

## Carver's Auto Series presses bring a world of power and control options to your lab

Carver has incorporated over 100 years experience in laboratory presses into their automatic electrically powered benchtop presses for today's labs. Each Auto Series Plus press has a built-in hydraulic system with a control system for accurate programmable operation. A variety of models are available ranging in clamp force capacity from 15 to 48 tons and work areas ranging from 6" x 6" to 18" x 18". Press models include two- or four-column, pelletizing, heated, unheated and cooled configurations. All presses have integral safety enclosures with a clear front door for operator safety and observation. AutoPak power units are available for existing manual presses (see page 16). Auto Series presses feature integral power unit for automatic operation

Many Carver Auto Series (and Manual presses) are available in CE configurations. Please contact Carver for pricing and availability.

## A Complete Line of Automatic Electrically Powered Benchtop Presses for the Laboratory or Manufacturing Facility

Carver, Inc. introduces their New Auto Series Plus Automatic Hydraulic Laboratory Presses. These new presses feature a 7" color operator interface, enhanced platen temperature control with auto-tuning, ramp heating capability, and real-time trending of force and temperature. Another enhancement includes storage of up to 250 recipes with recipe preview. Optional features include data logging for cycle parameters and a seven day timer for auto platen heat-up.

Auto Series Plus press models are available with 15 to 48 tons of clamping force and  $6'' \times 6''$  to  $18'' \times 18''$  platens. These benchtop presses are used in quality control, research and development for test sample preparations, destructive testing, molding, laminating and fluid extraction.

- Large 7" color touch screen operator interface
- Storage of up to 250 recipes
- · Enhanced platen temperature control with auto-tuning
- Ramp heating capability
- Recipe preview
- Real-time trending of force and temperature
- Seven day timer for auto platen heat-up (optional)
- Datalogging of cycle parameters (optional)
- Access to logged data through Wi-Fi (optional)
- 48 ton models include an integral wrap-around floor stand

#### Auto Series "PL" Control Panel



#### Specifications

| Model                                                                            | Catalog                      | Max. Clamp                                               | Heated                 | Platen                                   | Ram              | Daylight                                 | Dimensions                                                       | Height                     | Weight                           |
|----------------------------------------------------------------------------------|------------------------------|----------------------------------------------------------|------------------------|------------------------------------------|------------------|------------------------------------------|------------------------------------------------------------------|----------------------------|----------------------------------|
|                                                                                  | Number                       | Force, Tons (lb)                                         | Platens                | Size (in)                                | Stroke (in)      | Opening (in)                             | W x D (in)                                                       | (in)                       | (lb)                             |
| Auto C-PL                                                                        | 3888                         | 15 (30,000)                                              | No                     | 6 x 6                                    | 6                | 0.75 to 16                               | 42.50 x 24.00                                                    | 45                         | 625                              |
| Auto C-PL,H                                                                      | 3889                         | 15 (30,000)                                              | Yes                    | 6 x 6                                    | 6                | 0 to 13                                  | 42.50 x 24.00                                                    | 45                         | 670                              |
| Auto M-PL                                                                        | 3890                         | 25 (50,000)                                              | No                     | 9 x 9                                    | 6                | 0.75 to 16                               | 42.50 x 24.00                                                    | 45                         | 625                              |
| Auto M-PL,H                                                                      | 3891                         | 25 (50,000)                                              | Yes                    | 9 x 9                                    | 6                | 0 to 12                                  | 42.50 x 24.00                                                    | 45                         | 690                              |
| AutoFour/1512-PL<br>AutoFour/1512-PL,H<br>AutoFour/1515-PL<br>AutoFour/1515-PL,H | 3892<br>3893<br>4530<br>4531 | 15 (30,000)<br>15 (30,000)<br>15 (30,000)<br>15 (30,000) | No<br>Yes<br>No<br>Yes | 12 x 12<br>12 x 12<br>15 x 15<br>15 x 15 | 6<br>6<br>6      | 1 to 17<br>0 to 12<br>8 to 17<br>2 to 12 | 50.00 x 29.25<br>50.00 x 29.25<br>50.00 x 29.25<br>50.00 x 29.25 | 46<br>46<br>46<br>46       | 995<br>1,200<br>1,500<br>1,775   |
| AutoFour/3012-PL<br>AutoFour/3012-PL,H<br>AutoFour/3015-PL<br>AutoFour/3015-PL,H | 3894<br>3895<br>4532<br>4533 | 30 (60,000)<br>30 (60,000)<br>30 (60,000)<br>30 (60,000) | No<br>Yes<br>No<br>Yes | 12 x 12<br>12 x 12<br>15 x 15<br>15 x 15 | 6<br>6<br>6      | 1 to 17<br>0 to 12<br>8 to 17<br>2 to 12 | 50.00 x 29.25<br>50.00 x 29.25<br>50.00 x 29.25<br>50.00 x 29.25 | 46<br>46<br>46<br>46       | 995<br>1,200<br>1,500<br>1,775   |
| AutoFour/4815-PL<br>AutoFour/4815-PL,H<br>AutoFour/4818-PL<br>AutoFour/4818-PL,H | 5400<br>5401<br>5402<br>5403 | 48 (96,000)<br>48 (96,000)<br>48 (96,000)<br>48 (96,000) | No<br>Yes<br>No<br>Yes | 15 x 15<br>15 x 15<br>18 x 18<br>18 x 18 | 4<br>4<br>4<br>4 | 6 to 19<br>0 to 15<br>6 to 19<br>0 to 15 | 55 x 36<br>55 x 36<br>55 x 36<br>55 x 36<br>55 x 36              | 72<br>72<br>72<br>72<br>72 | 3,074<br>3,384<br>3,074<br>3,444 |

Carver reserves the right to change specifications without notice. Presses and accessories may differ from photos shown. Carver strongly recommends the use of a safety shield and personal protection equipment when operating Carver equipment. Carver Inc 1569 Morris Street • Wabash Indiana USA • (P) 260-563-7577 • (F) 260-563-7625 • carverpress@acscorporate.com